

(19) World Intellectual Property Organization
International Bureau

10/509815

(43) International Publication Date
23 October 2003 (23.10.2003)


PCT

(10) International Publication Number
WO 03/087736 A1

- (51) International Patent Classification⁷: G01G 19/32, 23/10
- (21) International Application Number: PCT/DK03/00224
- (22) International Filing Date: 7 April 2003 (07.04.2003)
- (25) Filing Language: Danish
- (26) Publication Language: English
- (30) Priority Data:
PA 2002 00505 7 April 2002 (07.04.2002) DK
- (71) Applicant (for all designated States except US): BILWINCO A/S [DK/DK]; Sverigesvej 9, DK-8660 Skanderborg (DK).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): BRIX, Flemming [DK/DK]; Tvævej 3, DK-8680 Ry (DK).
- (74) Agent: ZACCO DENMARK A/S; Hans Bekkevolds Allé 7, DK-2900 Hellerup (DK).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: A WEIGHING MACHINE

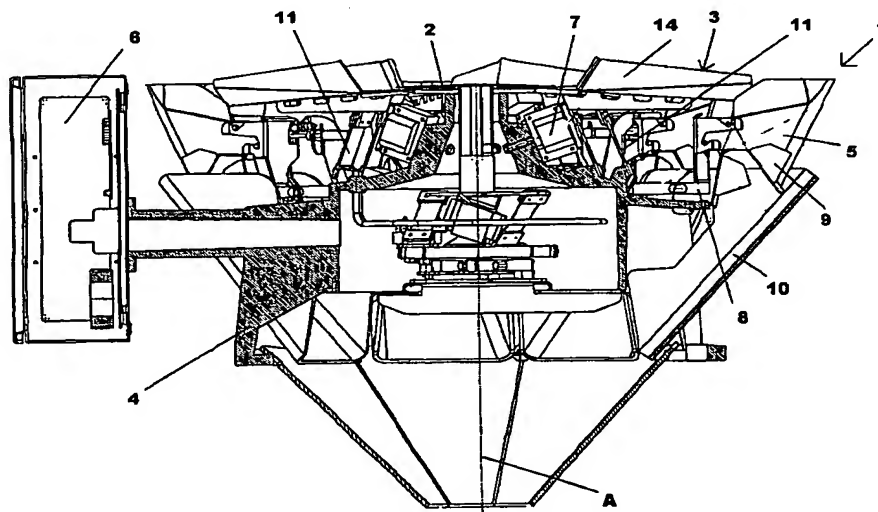

(57) Abstract: THE INVENTION RELATES TO A WEIGHING MACHINE FOR WEIGHING PORTIONS OF MATERIAL, WHICH WEIGHING MACHINE COMPRISES A FRAME STRUCTURE ON WHICH A CENTRAL DISTRIBUTOR, A PLURALITY OF LINEAR CONVEYORS AND A PLURALITY OF SCALES ARE MOUNTED, AND WHEREIN THE LINEAR CONVEYORS ARE ARRANGED AROUND THE CENTRAL DISTRIBUTOR AND EACH IS CONFIGURED AS A CONVEYOR DUCT SUSPENDED IN RELATION TO A COUNTERWEIGHT BY MEANS OF SPRING ELEMENTS EXTENDING BETWEEN THE CONVEYOR DUCT AND THE COUNTERWEIGHT IN SUCH A MANNER THAT THE TRANSPORT DUCT IS, BY MEANS OF A VIBRATOR INTENDED THEREFORE, CAUSED TO VIBRATE IN A VIBRATION PATTERN CAUSING IT TO TRANSPORT, DURING THE VIBRATION, MATERIAL FROM THE CENTRA DISTRIBUTOR AND RADIALY OUTWARDS TO THE SCALES. THE INVENTION IS CHARACTERISED IN THAT THE COUNTERWEIGHT FOR EACH OF THE TRANSPORT DUCTS IN THE LINEAR CONVEYORS ARE CONSTITUTED OF THE FRAME STRUCTURE OF THE MACHINE, THE SPRING ELEMENTS FOR EACH TRANSPORT DUCT BEING MOUNTED DIRECTLY ON THE FRAME STRUCTURE.

WO 03/087736 A1

WO 03/087736 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

A weighing machine

The present invention relates to a weighing machine for weighing portions of material, said weighing machine comprising a frame structure on which a central distributor is provided, a plurality of linear conveyors and a plurality of scales, and wherein the linear conveyors are arranged around the central distributor and each is configured as a conveyor duct suspended relative to a counterweight by means of spring elements extending between the conveyor duct and the counterweight in such a manner that the conveyor duct may be caused to vibrate by means of a vibrator intended therefore in a vibration pattern causing it to transport, during vibration, material from the central distributor and radially outwards to the scales.

Such weighing machines are used today primarily for generating portions of bulk material of a weight that is very close to a desired reference weight, thereby allowing the portions to be transferred to eg a packaging apparatus that packs the individual portions.

These weighing machines that are often designated combination weighing machines serve by each of the scales being, by means of the conveyors, charged with a constituent portion of the bulk material which was initially supplied to the central distributor and then, via the central distributor, it is transferred to the individual linear conveyors. Then the individual constituent portion of the bulk material is weighed in the individual scales, and by means of a calculator or a computer the scales are found that combine to contain bulk material of a weight close to the desired reference weight. Finally, the calculator is configured for activating the thus found scales to be emptied for forming the combined portion of the bulk material, and since combinations of scales that combine to contain the desired weight are continuously made and found, these machines enable very high production rates while forming many material portions that exhibit very small weight variations.

It is a problem of the prior art machines for this purpose, however, that it is necessary to configure both the central distributor and the individual conveyors such that a certain clearance is provided between them, and since
5 there is often a considerable amount of the bulk material on them, practice has shown that it is difficult to avoid that material, be it loose objects or liquid, pass through the clearances provided between the central distributor and the conveyors and between the conveyors as such.

10 In case of the prior art machines, it is thus often necessary to perform regular cleaning of the machine. Such material parts often deposit on the frame parts of the machine and they may wedge firmly between various constituents, thereby rendering cleaning difficult with ensuing problems eg with regard to hygiene.

15 In the light of this it is the object of the present invention to provide a weighing machine of the kind described above, whereby these hygiene problems have been completely or partially remedied.

20 This is accomplished in accordance with the invention as featured in claim 1 in that the counterweight for each of the transport ducts in the linear conveyors is constituted by the frame structure of the machine, the spring elements configured for each conveyor duct being mounted directly on the frame structure.

25 Thereby, a considerable amount of the components are removed that are, in conventional combination weights, used for providing counterweight for the vibrating linear conveyors, and the conventionally employed dampers in the form of rubber suspensions, etc, that have so far been provided between the
30 counterweight in the linear conveyors and the frame structure of the machine. The number of faces and hiding places underneath the linear weights where

material fragments may deposit or wedge firmly is thus considerably reduced thereby considerably facilitating cleaning of the combination weight.

According to the invention it is possible to employ various means for driving
5 the vibration of the linear conveyors, but according to the preferred
embodiment this is established by the vibration of each conveyor duct
comprising an current-carrying magnetizing element that will, by application
of a current, emit a varying magnetic field, and wherein the current-carrying
magnetizing element is mounted directly on the frame structure of the
10 machine in such a way, that the magnetic field produced by the magnetizing
element influences a conveyor duct configured opposite the magnetizing
element to vibrate in relation to the frame structure of the machine. As it is,
this will involve complete or partial compensation of the vibrations transferred
to the machine's frame structure via the spring elements.

15 In this context it is also an option that each of the scales is, via an electrical
weighing cell, mounted directly on the frame structure of the machine, which
weighing cell is configured for emitting an electrical signal in response to the
force by which the scale influences the weighing cell, and wherein weighing
20 operations can be performed of constituent portions while simultaneously the
linear conveyors are caused to vibrate, in that the machine comprises control
means configured for individually and as needed activating and stopping the
vibrations in each of the conveyor ducts, and wherein a calculator unit is also
provided for carrying out a calculation of the weight of material in each of the
25 scales, while simultaneously vibrations are activated in one or more of the
conveyor ducts.

Since, by the construction according to the present invention, the surprising
effect is accomplished that the vibrations transferred to the frame structure of
30 the machine are comparatively small it is an option that, in the weighing cell
for each of the scales, means are advantageously provided for filtering off the

electrical signals emitted by the weighing cell due to vibrations transmitted from the linear conveyors through the frame structure of the machine and to the weighing cell, which is a very simple way to remove noise, if any, from the weighing signal from each weighing cell, provided the noise was initiated
5 by the vibrations in the linear conveyors.

According to a particularly inexpensive and hence advantageous embodiment the means for filtering-off are in the form of an electronic filter.

10 In order to further obviate that the vibrations from the vibrating, linear conveyors are to result in noise in the weighing signal from the individual scales, the frame structure of the machine is, according to an advantageous embodiment of the invention, manufactured in a moulding process by use of a metallic casting material, such as aluminium or some other metal alloy that
15 is suitable for moulding. Hereby it is enabled that it is possible in an easy manner to make such reinforcements and material thicknesses on the frame structure of the machine that, to the widest extent possible, reduce or remove vibrations that can be transmitted from the vibrating, linear conveyors and to the weighing cells.

20

According to a preferred embodiment this is accomplished in particular by the frame structure having an overall weight that is at least ten times and preferably more than forty times the weight of each of the conveyor ducts.

25 According to a further preferred embodiment of the invention it is possible to accomplish a further hygienic effect by configuring the frame structure such that it comprises one or more essentially uninterrupted shieldings in the form of shield faces that extend from a point below the central distributor or underneath the linear conveyors and outwards and downwards underneath
30 at least that end of the conveyors that, in the working position of the machine, faces away from the central distributor. Thereby the frame structure as such

may in itself cause any bulk material that drops there onto to slide off the frame structure or at least be easily removable there from.

5 The invention will now be described in further detail with reference to the drawing, wherein:

Figure 1 is a sketch showing in a planar sectional view through the central axis of the machine a weighing machine according to the invention, seen from the side;

10

Thus, Figure 1 illustrates a weighing machine 1, which weighing machine 1 comprises, like commonly known weighing machines for combined weighing of material, a central distributor 2, a number of conveyors 3 provided with ducts 14 and a number of scales 5. As is commonly known in case of
15 combination weighing machines of this type, a fully mounted weighing machine comprises a plurality of such linear conveyors 3 and scales 5 arranged peripherally in a circle around the central distributor. The machine 1 is constructed essentially symmetrically about its centre axis A and it comprises, as shown, a frame structure 4, which is highlighted herein by
20 hatching, on which conveyors 3 and scales 5 are mounted; in addition to this, the machine is provided with a guide housing 6 directly on the frame structure 4 of the machine, thereby considerably increasing the overall weight of the frame structure 4.

25 The functioning of the weighing machine 1 is such that, on the central distributor 2, an amount of bulk material desired to be portion is deposited. It may be eg objects of use, such as nails, screws, nuts, etc, or it may be food products, such as pieces of candy, winegum, fish or cheese.

30 By means of the central distributor 2, the bulk material is distributed on the individual conveyors 3. This may be accomplished in that the bulk material

slides on the central distributor, but often particular means are used to ensure such distribution, such as a vibrator as shown in the drawing and configured for imparting to the central distributor a spiralling movement about the central axis A of the weighing machine.

5

When the bulk material from the central distributor 2 reaches each of the conveyors, they will use eg a linear vibration motor 7, here in the form of an electrical coil being, according to a preferred embodiment, mounted directly on the frame structure 4 of the machine and induced with an alternating
10 current that thus generates a varying magnetic field in front of the coil 7 and causes the linear conveyor 3 to vibrate in a vibration pattern that ensures that the bulk material is moved outwards towards the peripherally arranged scales 5 that are thus filled at least partially with a portion of the bulk material. The scales 5 being thus each provided with a weighing cell 8 for weighing off the
15 transferred portion, the individual portions can hereby be weighed, and the bottom of the scale 5 being configured with an activatable flap 9, the weighed portion can be discharged in the collecting funnel 10 of the machine.

Several such linear conveyors 3 and scales 5 being provided, it is obvious
20 that the above-mentioned functioning with a convenient control, such as a computer control, configured in the shown guide housing 6, is able to perform repeated weighing operations and discharge operations of individual portions of the bulk material, and by combining two or more of the portions it is possible to form portions with very small variations compared to a desired
25 weight.

According to a preferred embodiment of the invention, the linear conveyors 3 are suspended directly on the frame structure 4 of the machine by means of leaf springs 11, whose one end is secured to the frame structure 4 of the
30 machine, and whose other end is secured to the duct 14. In a commonly known manner these leaf springs 11 are located in an inclined angle relative

to vertical in such a manner that the ducts are able to vibrate along a path that extends upwards and outwards, respectively, in relation to the central axis of symmetry A of the machine and back. This causes, in a known manner, material that is located on the vibrating duct 14 to be transported
5 outwards towards the periphery of the machine 1 as mentioned above.

The frame structure 4 according to the invention is, as indicated in the drawing, configured as a moulded piece, eg in aluminium, which brings about a high degree of freedom from a design point of view with regard to reducing
10 the natural oscillations, if any, that may be generated in the frame structure 4 from the vibrating linear conveyors 3. This can be accomplished eg by designing the frame structure 4 such that its inherent frequency is suitably far from the frequency for the alternating voltage applied to the electrical coils 7. For instance, it can also be accomplished by designing the frame structure 4
15 to have a weight that considerably exceeds the weight of the individual ducts 14. This increase in the weight of the frame structure 4 of the machine can also be enhanced by integrating as many constituent elements of the machine construction as possible in the frame structure of the machine, or by mounting them securely thereto. Thus, in the shown construction not only the
20 counterweights of the linear conveyors 3 are integrated in the frame structure, in accordance with the invention; but the shown control housing 6 contributes further to the overall weight.

Claims

1. A weighing machine for weighing portions of material, which weighing
5 machine comprises a frame structure on which a central distributor, a
plurality of linear conveyors and a plurality of scales are mounted, and
wherein the linear conveyors are arranged around the central distributor and
each is configured as a conveyor duct suspended in relation to a
10 counterweight by means of spring elements extending between the conveyor
duct and the counterweight in such a manner that the transport duct is, by
means of a vibrator intended therefore, caused to vibrate in a vibration
pattern causing it to transport, during the vibration, material from the central
distributor and radially outwards to the scales, **characterised in** that the
15 counterweight for each of the transport ducts in the linear conveyors are
constituted of the frame structure of the machine, the spring elements for
each transport duct being mounted directly on the frame structure.

2. A weighing machine according to claim 1, **characterised in** that the
vibrator configured for each transport duct comprises a current-carrying
20 magnetizing element that will, by application of a current, emit a varying
magnetic field, and wherein the current-carrying magnetizing element is
mounted directly on the frame structure of the machine in such a manner that
the magnetic field emitted from the magnetizing element influences a
transport duct arranged opposite the magnetizing element to vibrate in
25 relation to the frame structure of the machine.

3. A weighing machine according to claim 1 or 2, **characterised in** that each
of the scales is, via an electrical weighing cell, mounted directly on the frame
structure of the machine, said weighing cell being configured for emitting an
30 electrical signal in response to the force by which the scale influences the
weighing cell.

4. A weighing machine according to claim 3, **characterised in** that the machine comprises control means that are configured for individually and as required activating and discontinuing the vibrations in each of the conveyor
5 ducts, and wherein there is further provided a calculator unit for performing a calculation of the weight of material in each of the scales, while simultaneously vibrations are activated in one or more of the conveyor ducts.
- 10 5. A weighing machine according to claim 4, **characterised in** that, in the calculator unit or the weighing cell for each of the scales, means are provided for filtering off the electrical signals emitted by the weighing cell due to vibrations transmitted from the linear conveyors through the frame structure of the machine and to the weighing cell.
- 15 6. A weighing machine according to claim 5, **characterised in** that the means for filtering off are in the form of an electronic filter.
- 20 7. A weighing machine according to one of the preceding claims, **characterised in** that the frame structure of the machine is manufactured in a moulding process by use of a metallic moulding material, such as aluminium or other metal alloy suitable for moulding.
- 25 8. A weighing machine according to claim 7, **characterised in** that the frame structure has an overall weight that is at least ten times and preferably more than 40 times the weight of each of the conveyor ducts.
- 30 9. A weighing machine according to one of the preceding claims, **characterised in** that the frame structure of the machine comprises one or more essentially uninterrupted shieldings in the form of shield faces that extend outwards and downwards in relation to the centre axis A of the machine underneath the central distributor 2 and/or the linear conveyors 3.

1/1

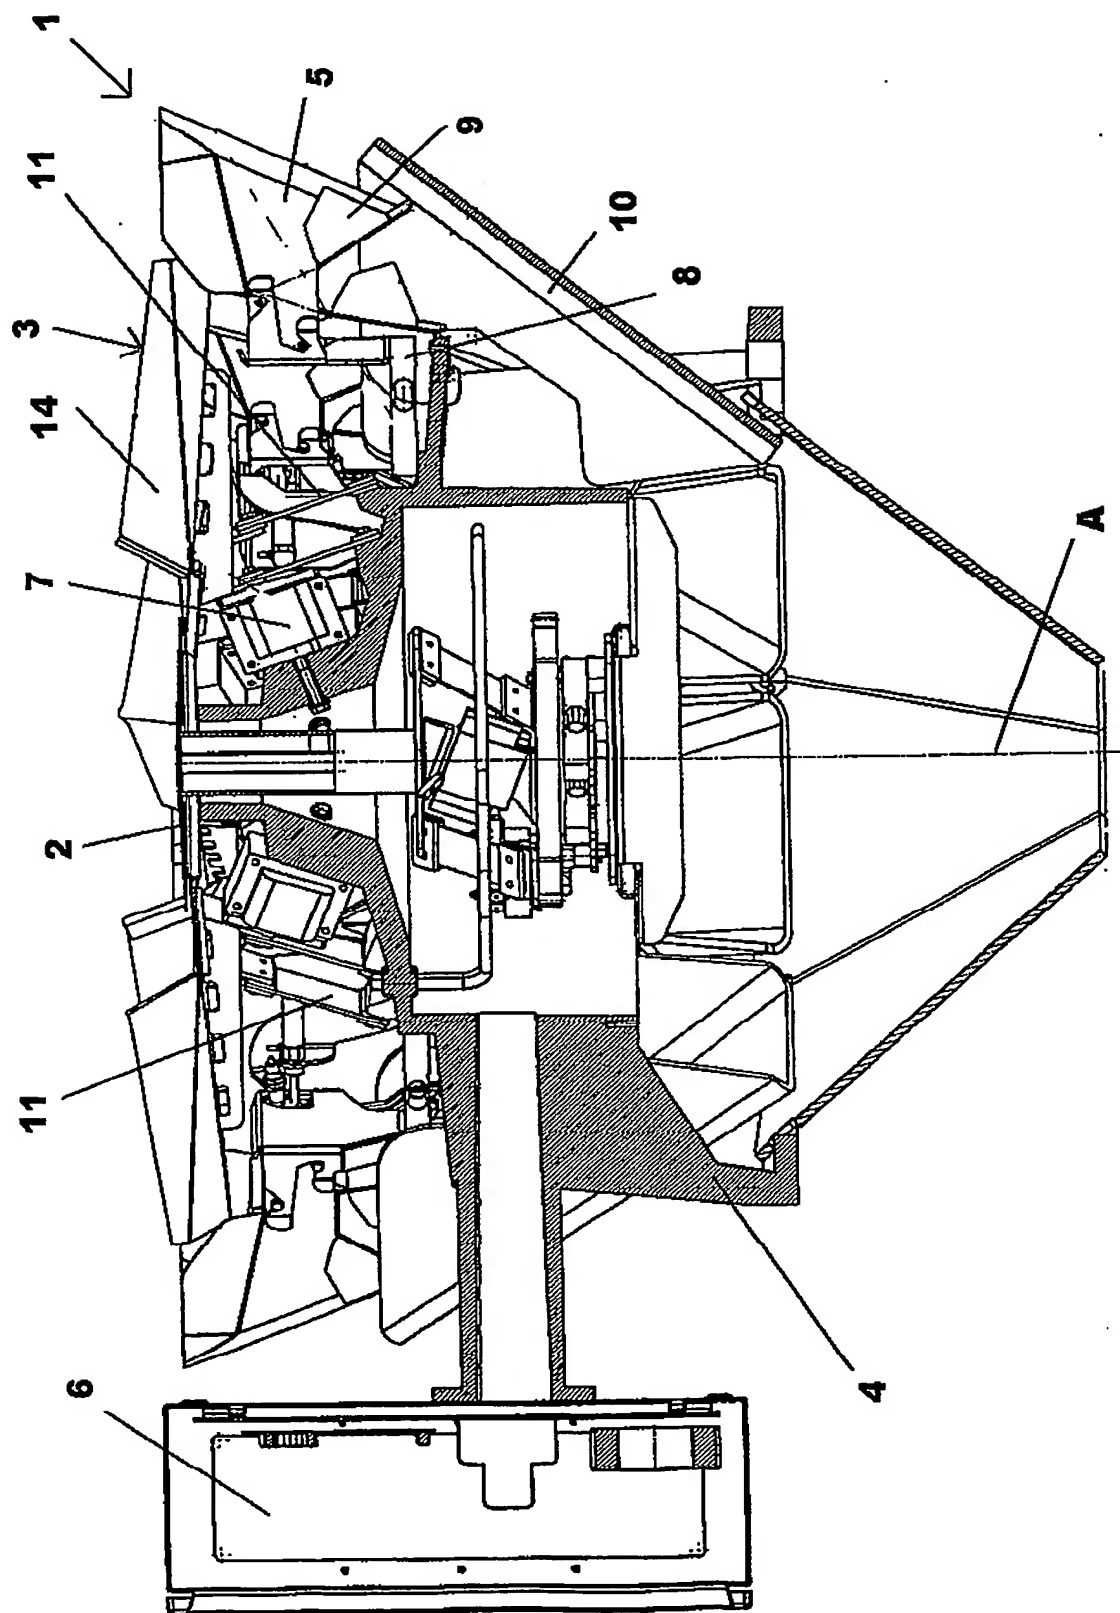


Fig. 1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 03/00224

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G01G 19/32, G01G 23/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G01G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6291781 B1 (T.OHTANI ET AL), 18 Sept 2001 (18.09.01), see the whole document --	1-9
A	US 4600096 A (S.YAMANO ET AL), 15 July 1986 (15.07.86), see the whole document --	1-9
A	US 4398612 A (Y.MIKAMI ET AL), 16 August 1983 (16.08.83), see the whole document --	1-9
A	EP 0781718 A2 (ISHIDA CO.,LTD.), 1 July 1998 (01.07.98), see the whole document --	1-9

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 May 2003

Date of mailing of the international search report

18-06-2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Åsa Malm /itw

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/DK 03/00224

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0075488 A2 (KABUSHIKI KAISHA ISHIDA KOKI SEISAKUSHO), 30 March 1983 (30.03.83), see the whole document -- -----	1-9

INTERNATIONAL SEARCH REPORT
Information on patent family members

29/04/03

International Application No.

PCT/DK 03/00224

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	6291781	B1	18/09/01	EP	1058100 A	06/12/00
				JP	2000346699 A	15/12/00
<hr/>						
US	4600096	A	15/07/86	AU	550275 B	13/03/86
				AU	3250984 A	25/07/85
				CH	664947 A	15/04/88
				DE	3433522 A,C	25/07/85
				FR	2558590 A,B	26/07/85
				GB	2153092 A,B	14/08/85
				GB	8422218 D	00/00/00
				IT	1179840 B	16/09/87
				IT	8468191 D	00/00/00
				JP	1837413 C	11/04/94
				JP	5030725 B	10/05/93
				JP	60153335 A	12/08/85
				NL	186832 B,C	01/10/90
				NL	8402754 A	16/08/85
<hr/>						
US	4398612	A	16/08/83	AU	523588 B	05/08/82
				AU	6867081 A	29/10/81
				DE	3111811 A,C	28/01/82
				FR	2479461 A,B	02/10/81
				GB	2074329 A,B	28/10/81
				JP	56140050 A	02/11/81
				US	4664200 A	12/05/87
				GB	2085172 A,B	21/04/82
				JP	1424051 C	15/02/88
				JP	57056721 A	05/04/82
JP	62030367 B	02/07/87				
<hr/>						
EP	0781718	A2	01/07/98	DE	69623427 D	00/00/00
				JP	9263317 A	07/10/97
				US	6168010 B	02/01/01
				JP	9235016 A	09/09/97
<hr/>						
EP	0075488	A2	30/03/83	AU	544008 B	16/05/85
				AU	8844382 A	31/03/83
				DE	3272333 D	00/00/00
				JP	58042305 A	11/03/83
<hr/>						